



LOCTITE® AA 3301

April 2026

Product description

LOCTITE® AA 3301 provides the following product characteristics:

Technology	Acrylic
Chemical type	Acrylated urethane
Appearance (uncured)	Transparent liquid
Components	One component - requires no mixing
Viscosity	Low
Flexibility	Enhances load bearing & shock absorbing characteristics of the bond area.
Cure	Ultraviolet (UV) / visible light
Application	Bonding
Specific benefits	Production - high speed curing

LOCTITE® AA 3301 is primarily designed for bonding rigid or flexible PVC to polycarbonate. These characteristics enable easy assembly of components with close fitting tolerances (i.e. joining polycarbonate to flexible PVC tubing). The product has shown excellent adhesion to a wide variety of substrates including glass, many plastics and most metals. Suitable for use in the assembly of **disposable medical devices**.

ISO-10993

LOCTITE® AA 3301 has been tested to Henkel's test protocols based on ISO 10993 biocompatibility standards, as a means to assist in the selection of products for use in the medical device industry.

Typical properties of uncured material

Aluminium alclad @ 25°C	1.0
Refractive index	1.48
Viscosity, Brookfield - RVT, 25°C, mPa·s (cP)	
Spindle 1, Speed 20 rpm	150

Typical curing performance

LOCTITE® AA 3301 can be cured by exposure to UV and/or visible light of sufficient intensity. To obtain full cure on surfaces exposed to air, radiation @ 220 to 260 nm is also required. The speed and depth of cure will depend upon the UV intensity and spectral distribution of the light source, the exposure time and the light transmittance of the substrates.

Stress cracking

Liquid adhesive is applied to a medical grade polycarbonate bar 6.4 cm by 13 mm by 3 mm which is then flexed to induce a known stress level.

Stress cracking, ASTM D 3929, minutes:

7 N/mm ² stress on bar	15
12 N/mm ² stress on bar	4

Fixture time

Fixture time is defined as the time to develop a shear strength of 0.1 N/mm².

UV Fixture time, Glass microscope slides, seconds:

LED flood light, CL42:

514 mW/cm ² , measured @ 405nm	5
100 mW/cm ² , measured @ 365nm	5

UV Fixture time, Glass microscope slides, seconds:

Black light, Zeta® 7500 light source:

6 mW/cm ² , measured @ 365nm	15
---	----

UV Fixture time, Polycarbonate, seconds:

Metal halide bulb (doped):

30 mW/cm ² , measured @ 365nm	5
--	---

Electrodeless, H & V bulbs:

50 mW/cm ² , measured @ 365nm	5
--	---

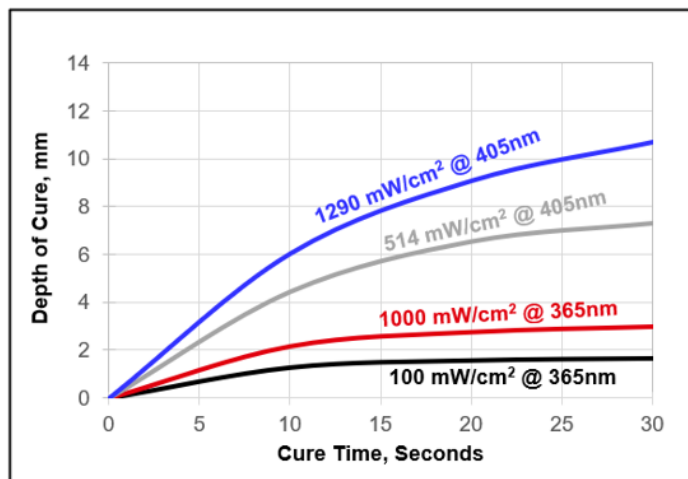
Electrodeless, D bulb:

50 mW/cm ² , measured @ 365nm	5
--	---



Depth of cure vs. irradiance (LED)

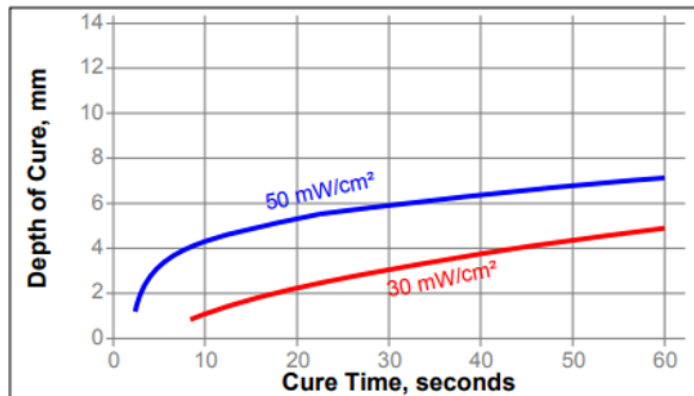
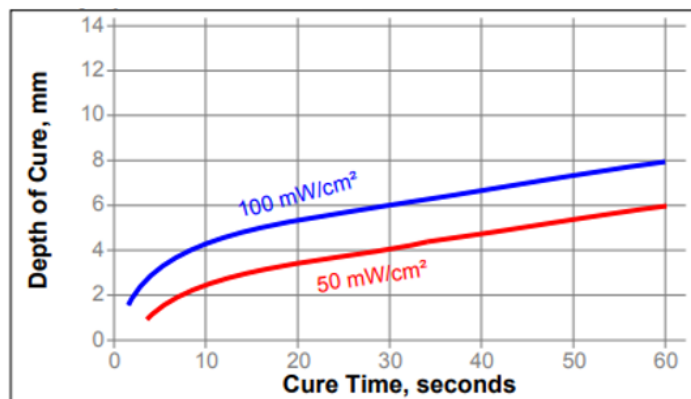
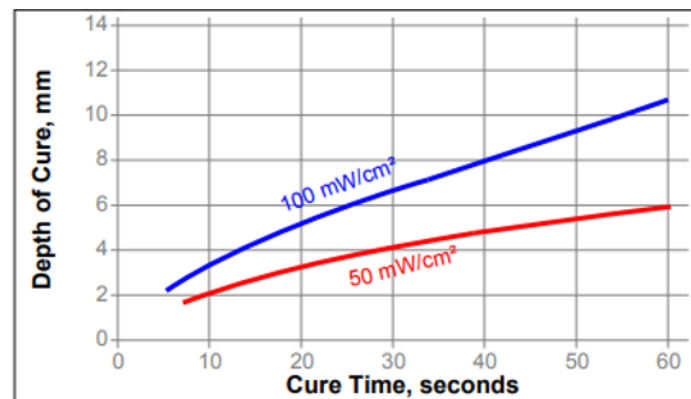
The graph below shows the increase in depth of cure with time at various light intensities as measured from the thickness of the cured product formed.

**Depth of cure vs. irradiance (365 nm)**

The graph below shows the increase in depth of cure with time at 50 mW/cm² – 100 mW/cm² as measured from the thickness of the cured product formed in a 15mm diameter PTFE die.

Note:

When exposed to a V Bulb at irradiances of 50 and 100 mW/cm² for 30 seconds, a depth of cure greater than 13 mm was achieved. The performance for medium pressure Hg will be similar to Electrodeless system, H bulb.

Curing system: metal halide (doped)**Curing System: Electrodeless, D bulb****Curing System: Electrodeless, H bulb****Typical properties of cured material**

Cured @ 30 mW/cm², measured @ 365 nm, for 80 seconds using a glass filtered metal halide light source.

Physical properties

Shore Hardness, ISO 868, Durometer D	69
Refractive index	1.51
Water Absorption, ISO 62, %	3
2 hours in boiling water	
Elongation, at break, ISO 527-3, %	50
Tensile strength at break, ISO 527-3	N/mm ² 19 (psi) (2,700)
Tensile modulus, ISO 527-3	N/mm ² 738 (psi) (107,000)

Electrical properties:

Dielectric constant/dissipation factor, IEC 60250:

100Hz	3.89 / 0.04
1kHz	3.78 / 0.01
1MHz	3.61 / 0.03

Dielectric breakdown strength, kV/mm	34
Surface resistivity, IEC 60093, Ω	9.7×10 ¹⁴
Volume resistivity, IEC 60093, Ω·cm	9.2×10 ¹⁴



Adhesive properties

Cured @ 30 mW/cm², measured @ 365 nm, for 80 seconds using a metal halide light source.

Lap shear strength:

Polycarbonate

0.5mm gap

N/mm²
(psi) *5
(700)

* Substrate failure

Typical environmental resistance

Cured @ 30 mW/cm², measured @ 365 nm, for 80 seconds using a metal halide light source.

Lap shear strength:

Polycarbonate

0.5mm gap

Heat aging

Lap shear strength, % of initial strength

Polycarbonate:

Aged @ 71°C for 170 hours * 100

Aged @ 71°C for 340 hours * 100

Aged @ 93°C for 170 hours * 100

Aged @ 93°C for 340 hours * 100

* Substrate failure

Chemical/solvent resistance

Aged under conditions indicated and tested @ 23°C.

Environment	°C	% of initial strength		
		2 h	24 h	170 h
Boiling water	100	* 100	----	----
Water immersion	49	----	----	* 100
Water immersion	87	----	----	35
Isopropanol immersion	22	----	* 100	----

Effects of sterilization

In general, products similar in composition to LOCTITE® AA 3301 subjected to standard sterilization methods, such as EtO and Gamma Radiation (25 to 50 kiloGrays cumulative) show excellent bond strength retention. LOCTITE® AA 3301 maintains bond strength after 1 cycle of steam autoclave. It is recommended that customers test specific parts after subjecting them to the preferred sterilization method. Consult with Loctite® for a product recommendation, if your device will see more than 3 sterilization cycles.

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Directions for use:

1. This product is light sensitive; exposure to daylight, UV light and artificial lighting should be kept to a minimum during storage and handling.
2. The product should be dispensed from applicators with black feedlines.
3. For best performance bond surfaces should be clean and free from grease.
4. Cure rate is dependent on lamp intensity, distance from light source, depth of cure needed or bondline gap and light transmission of the substrate through which the radiation must pass.
5. Cooling should be provided for temperature sensitive substrates such as thermoplastics.
6. Plastic grades should be checked for risk of stress cracking when exposed to liquid adhesive.
7. Excess uncured adhesive can be wiped away with organic solvent (e.g. Acetone).
8. Bonds should be allowed to cool before subjecting to any service loads.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Optimal storage: 8°C to 21°C. Storage below 8°C or greater than 28°C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Henkel representative.

Product specification

The technical data contained herein are intended as reference only and are not considered specifications for the product. Product specifications are located on the Certificate of Analysis or please contact Henkel representative.

Approval and certificate

Please contact Henkel representative for related approval or certificate of this product

Data ranges

The data contained herein may be reported as a typical value. Values are based on actual test data and are verified on a periodic basis.

Temperature/Humidity Ranges: 23°C / 50% RH = 23±2°C / 50±5% RH

Conversions

(°C x 1.8) + 32 = °F
kV/mm x 25.4 = V/mil
mm / 25.4 = inches
µm / 25.4 = mil
N x 0.225 = lb
N/mm x 5.71 = lb/in
N/mm² x 145 = psi
MPa x 145 = psi
N·m x 8.851 = lb·in
N·m x 0.738 = lb·ft
N·mm x 0.142 = oz·in
mPa·s = cP



Disclaimer

The information provided in this Technical data sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical data sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 4